

PUBLIC ADDRESS / MIXERS / WALL

## WALLMIX-BK

WALL-MOUNTED AUDIO MIXER



- ✓ Microphone and auxiliary inputs
- ✓ Bluetooth player
- ✓ Expands the functions of an amplifier
- ✓ Easy user connection
- ✓ Compatible with standard universal round and square boxes



+ Info:

<https://fonestar.com/WALLMIX-BK>

ESPECIALLY RECOMMENDED IN:



Hospitality



Retail



Hotels



All sectors

## DESCRIPTION

Bluetooth® wall-mounted audio mixer.

## TECHNICAL CHARACTERISTICS

FEATURES	<p>Audio mixer. Bluetooth player. Compatible with standard universal square and round boxes. Remote or local power supply. Connection via Cat 6 cable and RJ45 or audio cable. Option to change Bluetooth ID name and password upon request. Compatible with MAX amplifiers.</p>
BLUETOOTH	<p>Bluetooth 5.3 10 m transmission distance</p>
INPUTS	<p>1 balanced microphone with Phantom (12–24V). XLR connector. Signal level 5.6 mV RMS (-45 dBV) / 600 Ohm 1 AUX. 3.5 mm TRS jack connector. Signal level 316 mV RMS (-10 dBV) / 47,000 Ohm</p>
OUTPUTS	<p>2 balanced line inputs L/R. Euroblock and RJ45 connectors. Selectable signal level: 250 mV RMS (-12 dBV) or 1 V RMS (0 dBV) / 47,000 Ohm</p>
FUNCTIONS	<p>Microphone priority over AUX and Bluetooth selectable by signal level Bluetooth can be disabled Signal and Bluetooth indicator LEDs Connection via Cat 5/6 cable. Maximum distance &lt; 100 m</p>
CONTROLS	<p>Volume controls Pairing button Stereo/mono Output level Phantom power Microphone priority Bluetooth on/off</p>
MATERIALS	<p>ABS</p>
TEMPERATURE	<p>Operating temperature: -10° ~ 40°C Storage temperature: -20° ~ 60°C</p>



+ Info:

<https://fonestar.com/WALLMIX-BK>


COLOUR	Black (RAL 9005)
POWER SUPPLY	12 – 24 V DC, 100 mA External power supply not included
DIMENSIONS	Exterior: 83 x 83 x 41 mm depth Mounting: 51 x 49 x 33.5 mm depth Distance between screws: 60 mm
WEIGHT	0.1 kg
OPTIONAL	Compatible with MAX amplifiers, direct connection via Cat 6 cable
NOTE	Possibility of changing the Bluetooth ID name using software Firmware with different Bluetooth names and passwords is available in the software section.



+ Info:

<https://fonestar.com/WALLMIX-BK>

## BLOCK DIAGRAM

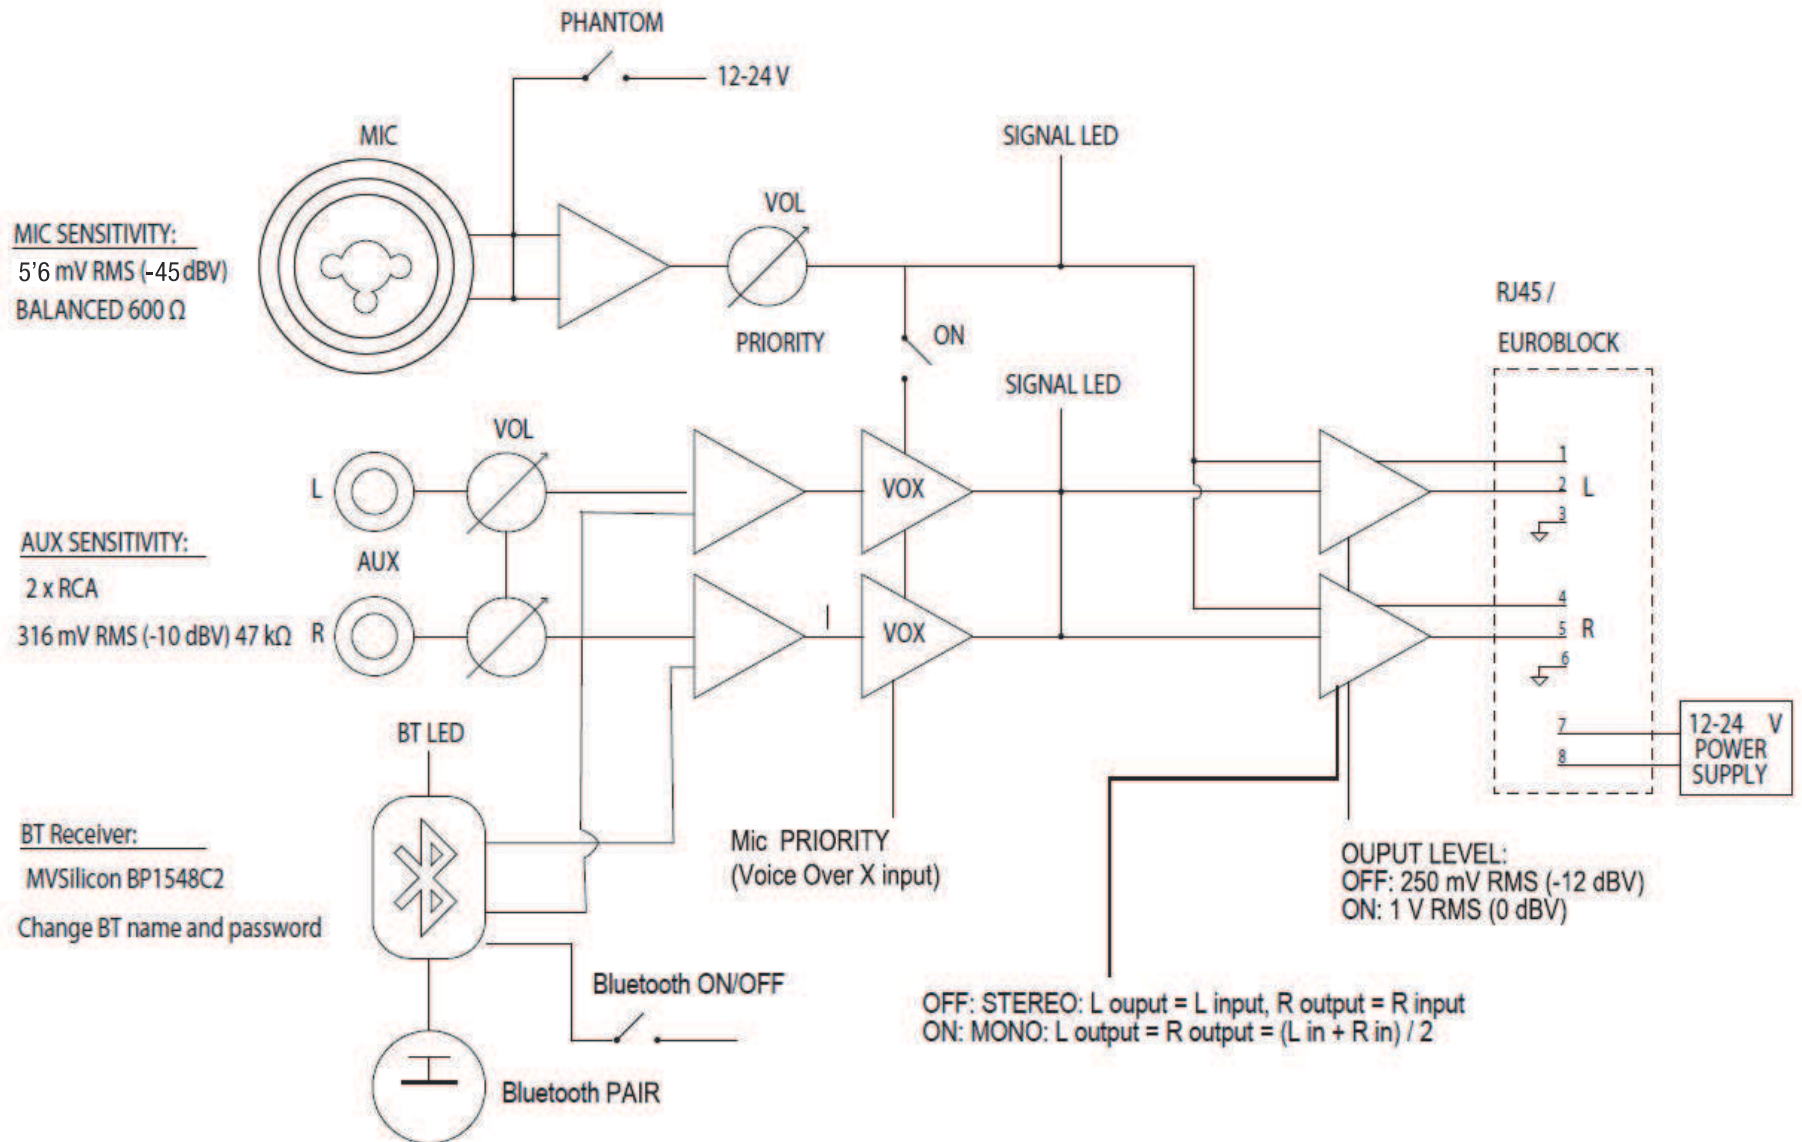

Product:  
WALLMIX Block Diagram

Date: 2026-04-29

**FONESTAR**  
www.fonestar.es